

UAC SKIRTING
WOODLIKE DECORATIVE SERIES

UAC Skirting




UAC Skirting protects the joints between the wall and the floor effectively from rot, kicks, scuffs, abrasions, and furniture scratches. UAC Skirting is easily installed and it also provides a decorative value when installed as wall-to-floor skirting or wall-to-ceiling cornices.

APPLICATIONS

- Skirting
- Cornice
- Architrave

Dimensions (mm)	Nominal Weight (kg)
2400 × 100 × 9.0	2.4
2400 × 100 × 12.0	3.0

EDGE FINISHES

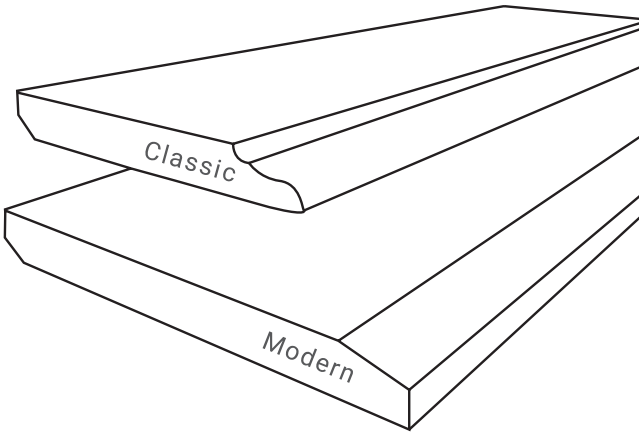

SURFACE FINISHING





TYPICAL CONNECTION DETAIL

1. Mark positions on skirting, depending on the spacing of the fixing points. Apply construction adhesive (i.e. Bostic, Xtraseal, Shelleys, Max bond, etc.) on the back of the skirting and hold it in place.


2. Fix with concrete nail fasteners or approved equivalent, length 25mm. Spacing of the fasteners as specified in accordance to the manufacturer's specification, which is 300mm centres maximum.

3. Clean the nail head by wiping off the dust by using a clean cloth. Conceal the screw heads with UAC Jointing Compound, paintable Polyurethane sealant (PU sealant), Modified Silicone sealant, or approved equivalent filler. Apply the same process of sealing up to 3-5mm gaps between two pieces of skirting.

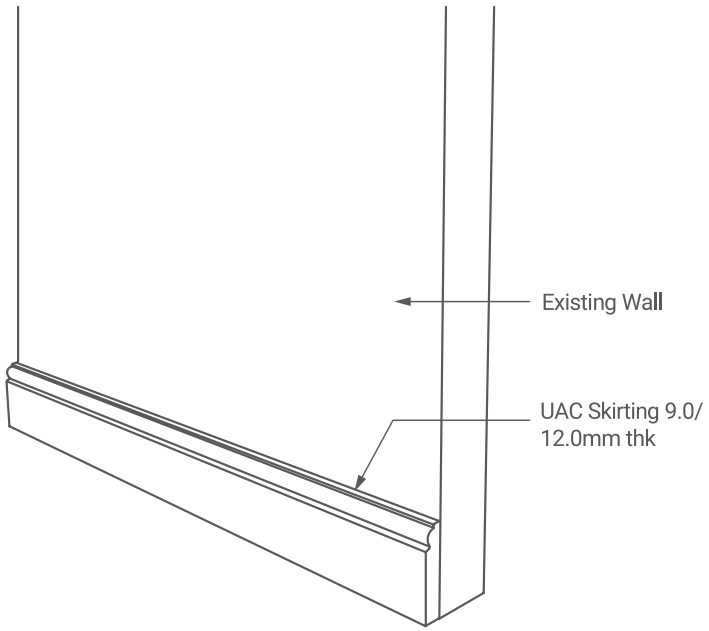

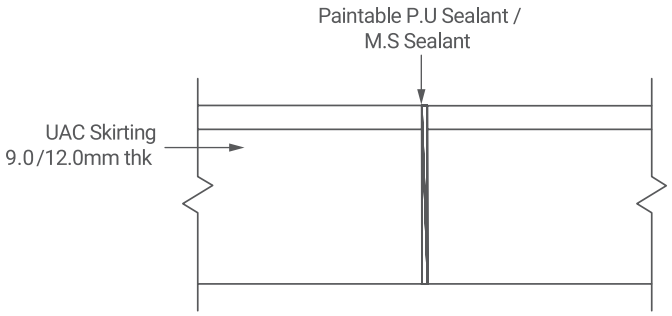

JOINTING DETAIL

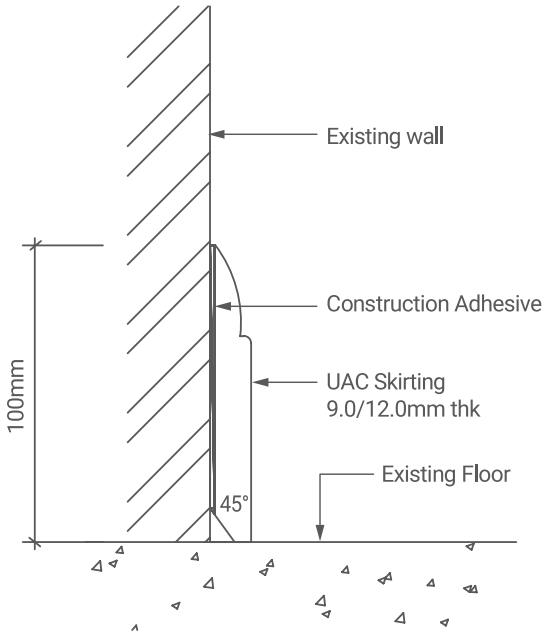


TYPICAL SECTION

A Member of Boustead Group

UAC BERHAD
196301000271 (5149-H)

SALES OFFICE
Level 10, Menara UAC, No. 12, Jalan PJU 7/5, Mutiara Damansara,
47800 Petaling Jaya, Selangor Darul Ehsan, Malaysia.
Tel: +603 7721 9393 **Fax:** +603 7721 9300 **Email:** sales@uac.com.my

@uacberhad www.uac.com.my uacberhad

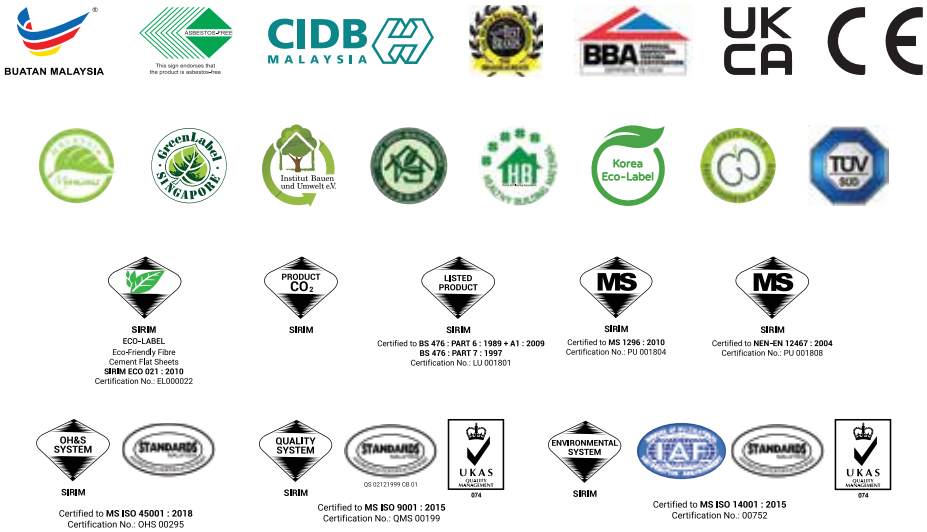

Copyright @ 2023. UAC Berhad. All rights reserved.