



NON-SHRINK GROUT webertec NSG 124

High Strength High Flowable Shrinkage Compensated Grout

webertec NSG 124 is a high strength, high flowable (fluid), shrinkage compensated grout. Pre-mixed grout, pumpable and designed also for dry pack & plastic consistency. Chloride free and high fluidity consistency.

PRODUCT BENEFITS



EXCELLENT
DURABILITY

USES

- Under columns, base plates and machinery not subjected to heavy impact; but able to withstand dynamic loadings or vibration.
- Suitable for pressure grouting (pumpable).
- Grout jacking of concrete structure.
- Repair of concrete structure.
- Void backfilling in tunnel works.
- Underpinning of buildings.
- Grouting of bridge bearing plinth.
- Permanently anchoring posts, signs, railings, columns and other fixtures in concrete, rock or masonry.
- Pile grouting.

TECHNICAL DATA & PHYSICAL PROPERTIES

Colour	Grey
Density	~2200 kg/m ³
pH of mix	Approx. > 10
Shelf Life	12 months
Inflammability	No
Toxicity Hazard	No
Water Demand	4.00 liters - 16.0% (Pourable) 4.50 liters - 18.0% (Flowable)
Yield	12.7 liters / 25 kg bags (Pourable) 13.4 liters / 25 kg bags (Flowable) Approx. 70 bags per cubic meter
Pot Life (Working Time)	Approx. 60 minutes
Application Temperature	Between 5°C - 40°C at normal ambient temperature
Temperature Resistance	100°C
Water Resistance	Good
UV Resistance	Good
Resistance to acids	Poor
Resistance to alkalis	Fair
Resistance to oil & solvents	Fair
Compressive Strength 1 Day water cured at 23°C	> 37 N/mm ²
EN 12190 Compressive Strength 7 Days water cured at 23°C EN 12190	> 62 N/mm ²
Compressive Strength 28 Days water cured at 23°C EN 12190	> 79 N/mm ²

High Strength High Flowable Shrinkage Compensated Grout

FEATURES AND BENEFITS

- Expansion system compensate for shrinkage and settlement whilst in the plastic state.
- Very good flow characteristics
- Can be prepacked, rammed, troweled & poured.
- High early strength and long-term durability.
- Initial setting time less than 5 hours to improve on-site productivity.
- Chloride free to prevent rusting of steel and anchor bolts.
- Pre-mixed grout, require only addition of water.

PREPARATION



- The substrate should be clean and sound. Free from any contamination including oil, grease, laitance and dust. For maximum bonding, the surface should be roughened and dampen with clean water.
- Immediately prior to grouting, remove free standing water.
- Metal surface must be free from rust, scale, oil or grease.
- Ensure voids and cavities are free from dust, water or any loose materials. Formwork should be well sealed to prevent leakage.

MIXING



- Mix a bag of **weberteg NSG 124** with 4.50 liters of clean water (18%)
- For optimum results **weberteg NSG 124** must be mixed for approximately 3 - 7 minutes by an electric mixer with high shear stirrer.
- Machine mixing is recommended to achieve continuous mixing effects.
- Place about 70 - 80% of pre-measured clean water into a clean container and gradually add the whole bag of **weberteg NSG 124** into it while continuously mixing. Add the remaining water until the desired consistency is achieved.

APPLICATION



- After mixing, stir lightly the mixture with spatula for a few seconds to release the entrapped air. The grout is then poured immediately into the prepared formwork.
- When pouring, the area to be grouted should be shuttered.
- Pour grout from one side until exceeding from another side. Grouting should be applied continuously for uninterrupted grout flow.
- Recommended pour should not exceed 100mm thickness per pour. For thickness in excess of 100mm, subsequent pour is required.
- After finishing of grouting, remove the unnecessary excess materials before the grout harden.
- It is essential that the ambient temperature should be between 5°C - 40°C and the grout is placed within 30 minutes after mixing.
- The grout is designed for void filling where adequate surface restraint can be provided.

Note It is the responsibility of users / applicators to determine condition & suitability of all surfaces; prior to actual application.

CURING

The exposed area should be covered with we hessian or plastic sheet to prevent excessive moisture loss.

SAINT-GOBAIN WEBER (M) SDN BHD

No 29 & 31, Jalan TIAJ 2/1, Taman Industri Alam Jaya, 42300 Bandar Puncak Alam, Selangor D E, Malaysia

 (603) 60389498/97/89  (603) 6038 9507  info.webermalaysia@saint-gobain.com  www.saint-gobain.my



High Strength High Flowable Shrinkage Compensated Grout

PACKING

Available in 25 kg bags.

SHELF LIFE / STORAGE

At least 12 months; when stored in dry conditions of normal ambient temperature.

TECHNICAL SERVICES

For further details or recommendation please contact our Technical Advisory / Specification Center at 603-6038 9498 (KL) & 604-626 2830 (Penang)



PRECAUTION

Do not add water above the recommended stated dosage.

- Use only clean (potable) water.
- Non-Toxic. However, avoid inhaling dust.
- If enter eyes wash out with water and seek medical attention.
- Keep away from children reach.
- May cause minor irritation to those with sensitive skin. Wear suitable gloves.
- Clean all tools and equipment promptly before material hardens. Hardened materials can only be removed mechanically.

Conditions Of Sales

Sold subject to Company's Condition of Sale, which is available upon request.

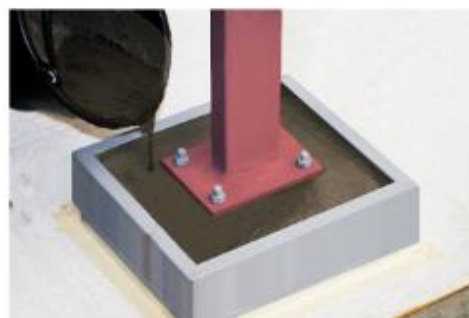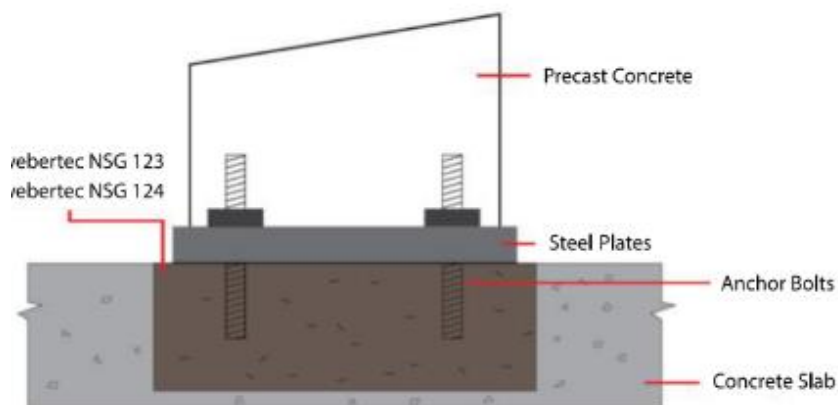

*Note Because it is not possible to give specific instructions for the various site conditions or to control the applications, the information on this Technical Data Sheet is for general guidance only. Saint-Gobain Weber (M) Sdn Bhd reserves the rights to amend the contents of the data sheet at its sole discretion. (Aug '24)



SAINT-GOBAIN WEBER (M) SDN BHD

No 29 & 31, Jalan TIAJ 2/1, Taman Industri Alam Jaya, 42300 Bandar Puncak Alam, Selangor D E, Malaysia

(603) 60389498/97/89 (603) 6038 9507 info.webermalaysia@saint-gobain.com www.saint-gobain.my

SAINT-GOBAIN